


## Cầu dao khối MCCB

## Specification


Product code : BKW-60S



### Operating characteristic curves

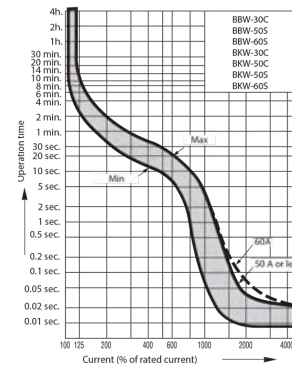

### Temperature compensation curve



Note: The method used to detect overcurrent is electromagnetic, so temperature compensation takes the form of an increase or decrease relative to the lead-out time and there is no change in the rated current.

### Standard included accessories (frontconnecting type)

Mounting screws	small round-head screws M4 x 0.7 x 54
Insulation barrier	2 pole: 1, 3 pole: 2

- Số cực: 2P/3P
- Kích thước khung 60AF
- Gắn thanh DIN
- Dòng điện định mức: 60A
- Điện áp định mức: 100-200V dùng chung
- Dòng rò: 30, 100 mA (2P)
- 100, 200, 500 (3P)
- Bảo vệ chống giật
- Trọng lượng : 0.4kg loại 2P; 0.5kg loại 3P