


Cầu dao khối MCCB

Specification


Product code : BKW-100



Operating characteristic curves

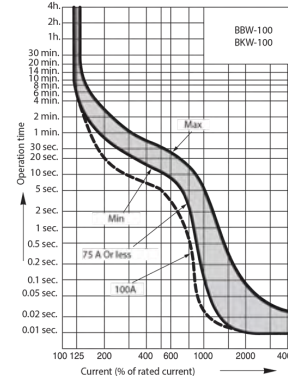

Temperature compensation curve



Note: The method used to detect overcurrent is electromagnetic, so temperature compensation takes the form of an increase or decrease relative to the lead-out time and there is no change in the rated current.

Standard included accessories (frontconnecting type)

Mounting screws	small round-head screws M4 x 0.7 x 54
Insulation barrier	2 pole: 1, 3 pole: 2

- Số cực: 2P/3P
- Kích thước khung 100AF
- Gắn thanh DIN
- Dòng điện định mức: 60A, 75A, 100A
- Điện áp định mức: 100-200V dùng chung
- Dòng rò: 30, 100-200-500 mA
- Bảo vệ chống giật
- Trọng lượng : 0.6kg