


Cầu dao khối MCCB

Specification


Product code : BBW-30C



Operating characteristic curves

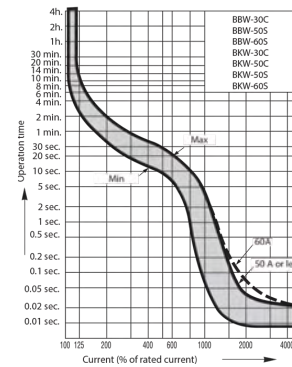

Temperature compensation curve



Note: The method used to detect overcurrent is electromagnetic, so temperature compensation takes the form of an increase or decrease relative to the lead-out time and there is no change in the rated current.

Standard included accessories (frontconnecting type)

Mounting screws	small round-head screws M4 x 0.7 x 54
Insulation barrier	2 pole: 1, 3 pole: 2

- Số cực: 2P/3P
- Kích thước khung 30AF
- Gắn thanh DIN
- Dòng điện định mức: 3A, 5A, 10A, 15A, 20A, 30A
- Điện áp định mức: 500V
- Dòng cắt: 1.5kA (415V)
- 2.5kA (100V, 200V)
- Cầu dao ngắt mạch điện
- Bảo vệ quá tải và ngắn mạch
- Trọng lượng : 0.3kg loại 1P; 0.4 loại 2P